




# DURABAL BK/BK 60

Balcony Angle Profile With Drip Edge For Thin-Bed Installation

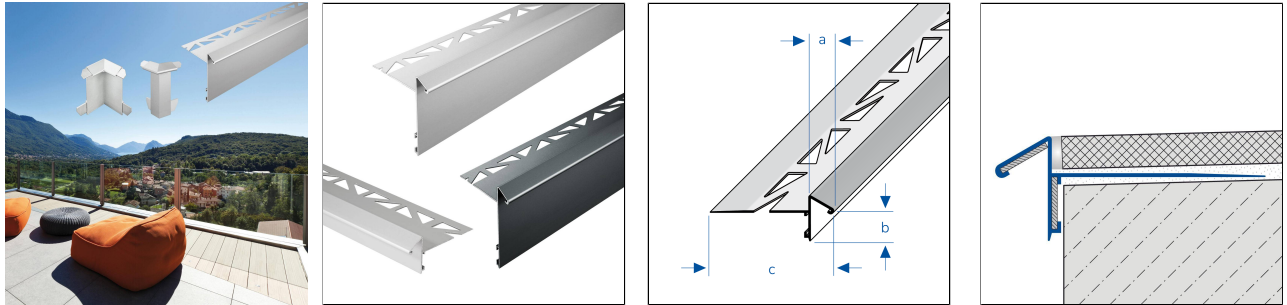

## INSTALLATION POSITION

Indoor and outdoor area

## ACCESSORIES

Matching corner pieces and connectors are available as accessories.

## MATERIAL

Aluminium can be used wherever medium mechanical stress is to be expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which is difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout from visible surfaces immediately with plenty of water, then wipe dry.

The suitability with regard to mechanical and chemical resistance must always be checked in each individual case.

## CARE

Aluminium does not require any special care. If necessary, it can be easily cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Avoid using acidic, alkaline or abrasive cleaning agents.

## PROCESSING

1. Select and adjust the profile according to the desired covering and installation height.
2. Apply tile adhesive to the substrate (concrete slab or dry screed) using a notched trowel.
3. Press the profile into the adhesive bed and align it in height and alignment.
4. Use suitable external and internal corners if required. Use the connectors available as accessories to connect several profiles.
5. Fill the fixing flanges completely with adhesive.
6. Press the covering firmly into place and align it so that it is flush with the top edge of the profile.
7. Leave a 1-2 mm gap between the profile and the covering.
8. Fill the space between the tiles and the profile completely with joint mortar.

Protect visible surfaces from contact with tile adhesive or joint mortar and clean immediately with a cloth and clear water if necessary. Then rub dry.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.  
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.  
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

## TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

|          |                                                |
|----------|------------------------------------------------|
| Material | [Aluminium]                                    |
| Surface  | [powder coated], [anodised]                    |
| Colour   | silver, anthracite, anthracite grey (RAL 7016) |
| Length   | 300 cm                                         |
| Height   | 9 mm, 11 mm, 13 mm, 22 mm                      |
| Width mm | 60 mm                                          |

## PRODUCT VARIANTS

| Ident             | Height | Surface       | Colour                     | Length |
|-------------------|--------|---------------|----------------------------|--------|
| BKAE 90/300       | 9 mm   | anodised      | silver                     | 300 cm |
| BKAE 90-60/300    | 9 mm   | anodised      | silver                     | 300 cm |
| BKAC 9016/300     | 9 mm   | powder coated | anthracite grey (RAL 7016) | 300 cm |
| BKAC 9016-60/300  | 9 mm   | powder coated | anthracite grey (RAL 7016) | 300 cm |
| BKAE 110/300      | 11 mm  | anodised      | silver                     | 300 cm |
| BKAE 110-60/300   | 11 mm  | anodised      | silver                     | 300 cm |
| BKAC 11016/300    | 11 mm  | powder coated | anthracite grey (RAL 7016) | 300 cm |
| BKAC 11016-60/300 | 11 mm  | powder coated | anthracite grey (RAL 7016) | 300 cm |
| BKAE 130/300      | 13 mm  | anodised      | silver                     | 300 cm |
| BKAE 130-60/300   | 13 mm  | anodised      | silver                     | 300 cm |
| BKAC 13016/300    | 13 mm  | powder coated | anthracite grey (RAL 7016) | 300 cm |
| BKAC 13016-60/300 | 13 mm  | powder coated | anthracite grey (RAL 7016) | 300 cm |
| BKAE 220/300      | 22 mm  | anodised      | silver                     | 300 cm |
| BKAC 22016-60/300 | 22 mm  | powder coated | anthracite                 | 300 cm |

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.  
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.  
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.