




DURABAL BO

T-Shaped Balcony Angle Profile For Installation With Supports

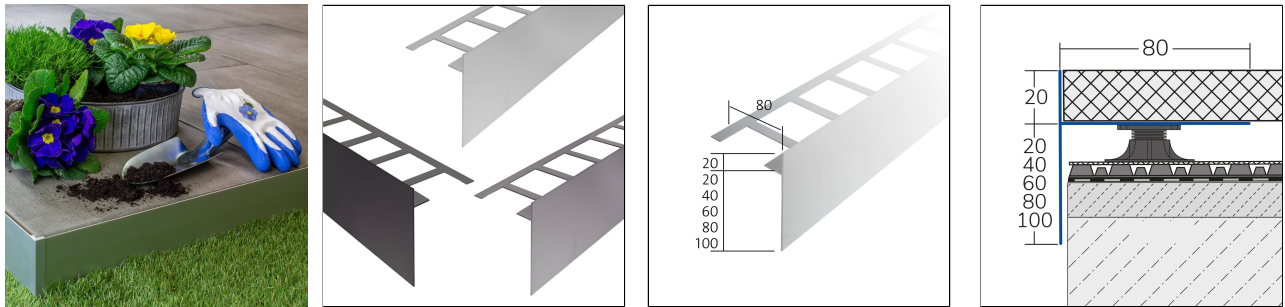

ACCESSORIES

Matching corner pieces and connectors are available as accessories.

MATERIAL

Aluminium can be used wherever medium mechanical stress is to be expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration, which is difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe off tile adhesive or grout from visible surfaces immediately with plenty of water, then wipe dry.

The suitability with regard to mechanical and chemical resistance must always be checked in each individual case.

CARE

Aluminium does not require any special care. If necessary, it can be easily cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Avoid using acidic, alkaline or abrasive cleaning agents.

PROCESSING

Installation on pedestal supports:

1. Position and adjust the supports according to the conditions. Create a straight edge at the predetermined breaking point on the supports adjacent to the profile.
2. Select and adjust the profile according to the desired installation height.
3. Place the profile on the support and align it in height and alignment. If necessary, secure it with SPEEDFLEX polymer adhesive, for example.
4. Use appropriate external or internal corners if required.
5. Several profiles can be joined together using the connectors available as accessories.
6. Finally, lay the covering professionally on the supports.

Installation using the thin-bed installation method:

1. Select and adjust the profile according to the required installation height.
2. Apply tile adhesive to the substrate (concrete slab or dry screed) using a notched trowel.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



3. Press the profile into the adhesive bed and align it in height and alignment.
 4. Use suitable external and internal corners if required. To connect several profiles, use the connectors available as accessories.
 5. Fill the entire surface of the fixing flange with adhesive.
 6. Press the covering firmly into place and align it so that it is flush with the profile edge.
 7. Leave a 1-2 mm gap between the profile and the floor.
- Protect visible surfaces from contact with tile adhesive or grout and clean immediately with a cloth and clear water if necessary. Then rub dry.

In both installation methods, the generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

| | |
|----------|--|
| Material | [Aluminium] |
| Surface | [powder coated], [anodised] |
| Colour | silver, light ivory (RAL 1015), anthracite grey (RAL 7016) |
| Length | 300 cm |
| Height | 40 mm, 60 mm, 80 mm, 100 mm, 120 mm |
| Width mm | 80 mm |

PRODUCT VARIANTS

| Ident | Height | Surface | Colour | Length |
|-----------------|--------|---------------|----------------------------|--------|
| BOAE 20-20/300 | 40 mm | anodised | silver | 300 cm |
| BOAC 4016/300 | 40 mm | powder coated | anthracite grey (RAL 7016) | 300 cm |
| BOAC 4015/300 | 40 mm | powder coated | light ivory (RAL 1015) | 300 cm |
| BOAE 20-40/300 | 60 mm | anodised | silver | 300 cm |
| BOAC 6016/300 | 60 mm | powder coated | anthracite grey (RAL 7016) | 300 cm |
| BOAC 6015/300 | 60 mm | powder coated | light ivory (RAL 1015) | 300 cm |
| BOAE 20-60/300 | 80 mm | anodised | silver | 300 cm |
| BOAC 8016/300 | 80 mm | powder coated | anthracite grey (RAL 7016) | 300 cm |
| BOAC 8015/300 | 80 mm | powder coated | light ivory (RAL 1015) | 300 cm |
| BOAE 20-80/300 | 100 mm | anodised | silver | 300 cm |
| BOAC 10016/300 | 100 mm | powder coated | anthracite grey (RAL 7016) | 300 cm |
| BOAC 10015/300 | 100 mm | powder coated | light ivory (RAL 1015) | 300 cm |
| BOAE 20-100/300 | 120 mm | anodised | silver | 300 cm |

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



| | | | | |
|----------------|--------|---------------|----------------------------|--------|
| BOAC 12016/300 | 120 mm | powder coated | anthracite grey (RAL 7016) | 300 cm |
| BOAC 12015/300 | 120 mm | powder coated | light ivory (RAL 1015) | 300 cm |

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.

DURAL GmbH | Südring 11 | D-56412 Ruppach-Goldhausen | Germany | +49 2602/9261-0 | info@dural.com

DURAL Ltd. | Unit 6a | Wakefield Business Centre Denby Dale Rd | Wakefield | WF2 7AZ | United Kingdom | ukinfo@dural.com

The recognised standards and regulations of technology must be observed. Previous data sheets are invalid.

www.dural.com