


SQUARELINE Stainless Steel (304)

Square Box Trim Profile Made Of Stainless Steel

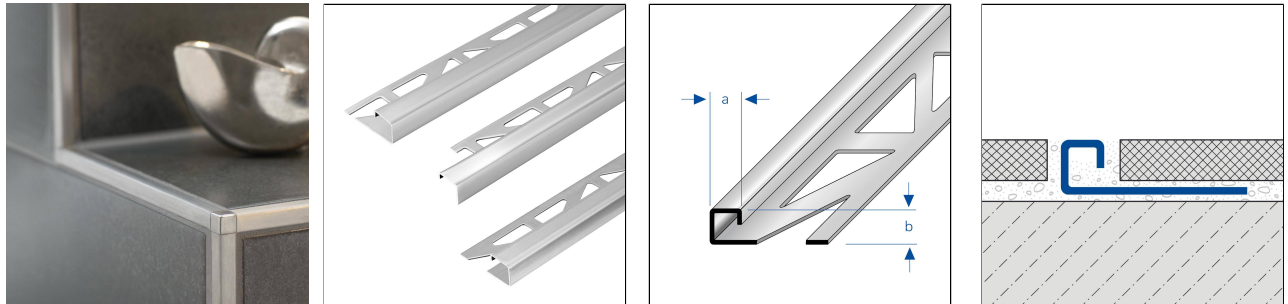

ACCESSORIES

Matching corner pieces are available as accessories.

MATERIAL

Stainless steel (V2A/304) is particularly suitable for areas of application subject to high mechanical stresses and where particularly high demands are placed on cleanliness, hygiene and chemical resistance. Contact with products containing hydrochloric acid should be avoided.

Tools made of unalloyed steel must not be used during processing. Open cut edges are not rust-resistant. If necessary, separate rust protection must be applied to cut-edges.

Depending on the environmental conditions, rust film may also form on stainless steel and should be removed immediately.

The usability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Stainless steel (V2A/304) does not require any special care. If necessary, it can simply be cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Acidic, alkaline and abrasive cleaning agents should be avoided. Flash rust can be removed with commercially available polishes suitable for stainless steel.

PROCESSING

1. Select the profile according to the tile thickness.
2. Apply tile adhesive with a notched trowel.
3. Press the profile into the adhesive bed and align.
4. Fill over the entire surface of the fixing leg.
5. Press the tiles firmly into place and align them so that they are flush with the upper edge of the profile. Lay the tiles fully flush.
6. Use suitable inner or outer corner pieces.
7. Leave a grout line of 1-2 mm to the profile.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



8. Fill the space between the tiles and the profile completely with grout.

Protect visible surfaces from contact with tile adhesive or grout and, if necessary, clean immediately with a cloth and clean water. Then wipe dry.

The generally recognised rules of technology must be observed. Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Stainless Steel (304)]
Surface	[natural], [high-gloss polished], [brushed]
Colour	natural
Length	250 cm, 300 cm
sight width	13.5 mm, 8 mm, 10 mm, 11 mm, 12 mm
Height	12.5 mm, 7 mm, 9 mm, 10 mm, 11 mm

PRODUCT VARIANTS

Ident	Height	Surface	Colour	Length
DPSE 70-SF/250	7 mm	brushed	natural	250 cm
DPSE 70-SP/250	7 mm	high-gloss polished	natural	250 cm
DPSE 70/250	7 mm	natural	natural	250 cm
DPSE 90-SF/250	9 mm	brushed	natural	250 cm
DPSE 90-SF/300	9 mm	brushed	natural	300 cm
DPSE 90-SP/250	9 mm	high-gloss polished	natural	250 cm
DPSE 90-SP/300	9 mm	high-gloss polished	natural	300 cm
DPSE 90/250	9 mm	natural	natural	250 cm
DPSE 90/300	9 mm	natural	natural	300 cm
DPSE 100-SF/250	10 mm	brushed	natural	250 cm
DPSE 100-SF/300	10 mm	brushed	natural	300 cm
DPSE 100-SP/250	10 mm	high-gloss polished	natural	250 cm
DPSE 100-SP/300	10 mm	high-gloss polished	natural	300 cm
DPSE 100/250	10 mm	natural	natural	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



DPSE 100/300	10 mm	natural	natural	300 cm
DPSE 110-SF/250	11 mm	brushed	natural	250 cm
DPSE 110-SF/300	11 mm	brushed	natural	300 cm
DPSE 110-SP/250	11 mm	high-gloss polished	natural	250 cm
DPSE 110-SP/300	11 mm	high-gloss polished	natural	300 cm
DPSE 110/250	11 mm	natural	natural	250 cm
DPSE 110/300	11 mm	natural	natural	300 cm
DPSE 125-SF/250	12.5 mm	brushed	natural	250 cm
DPSE 125-SF/300	12.5 mm	brushed	natural	300 cm
DPSE 125-SP/250	12.5 mm	high-gloss polished	natural	250 cm
DPSE 125-SP/300	12.5 mm	high-gloss polished	natural	300 cm
DPSE 125/250	12.5 mm	natural	natural	250 cm
DPSE 125/300	12.5 mm	natural	natural	300 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.

DURAL GmbH | Südring 11 | D-56412 Ruppach-Goldhausen | Germany | +49 2602/9261-0 | info@dural.com
DURAL Ltd. | Unit 6a | Wakefield Business Centre Denby Dale Rd | Wakefield | WF2 7AZ | United Kingdom | ukinfo@dural.com

The recognised standards and regulations of technology must be observed. Previous data sheets are invalid.

www.dural.com