


An interpretation of:  
**Norwegian National Opera House, Snøhetta, OSLO (Norway), 2008**



LOW THICKNESS

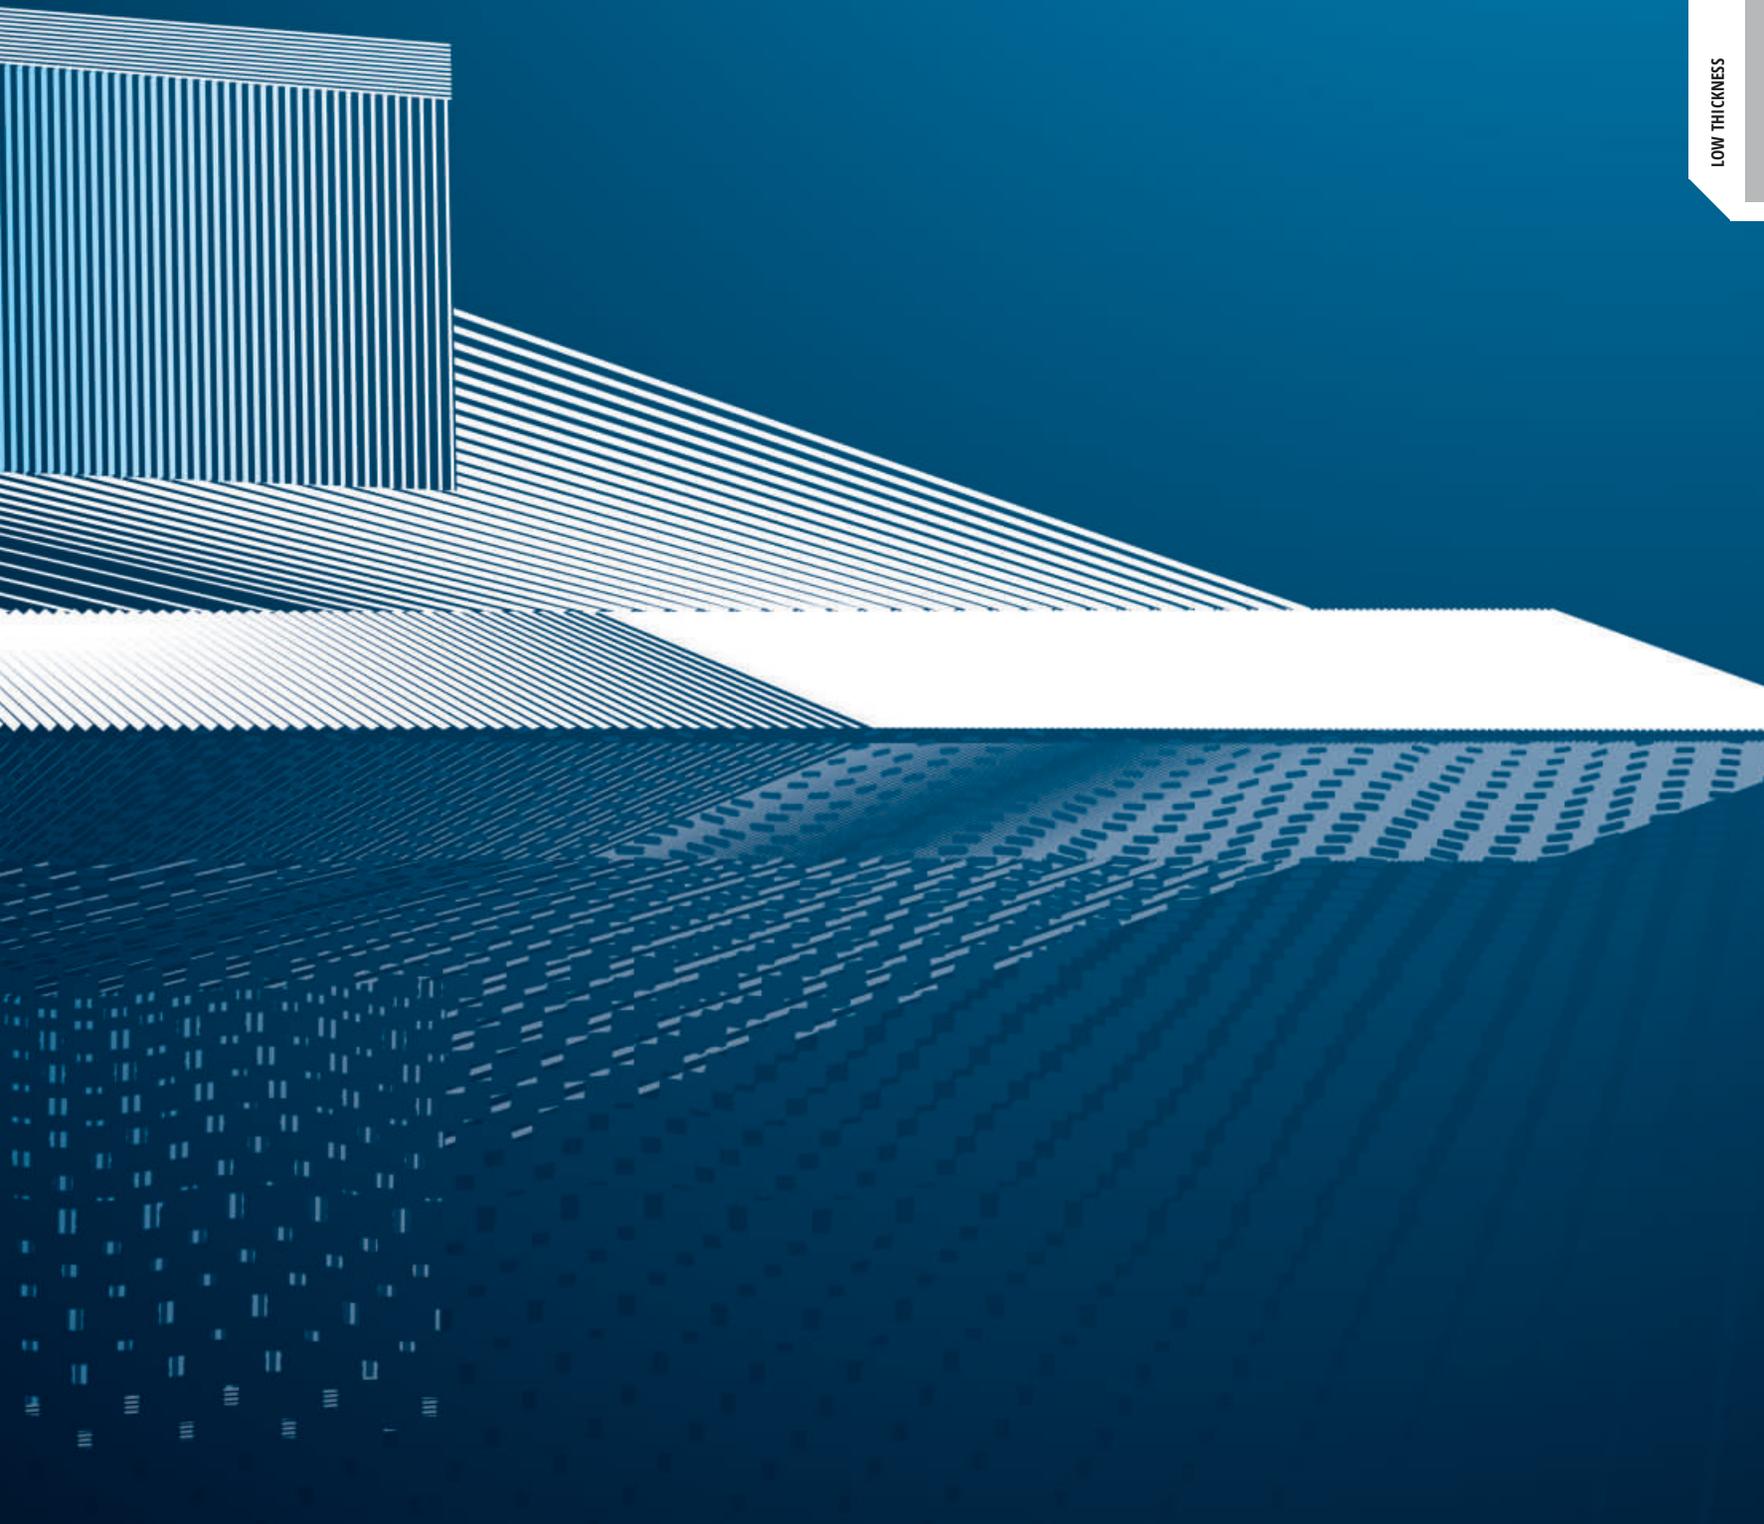


# PROKERLAM SQUARE


ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM

**PROKERLAM SQUARE** is a square corner bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make **PROKERLAM SQUARE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

PKLQ... 045  
scale 1:1



## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

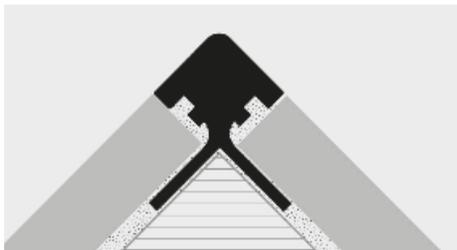

1. Choose "PROKERLAM SQUARE" according to the desired finish.
2. Cut "PROKERLAM SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROKERLAM SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



**ANODIZED SILVER ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm | €/Pc  |
|------------|------|------|-------|
| PKLQAA 045 | 4,5  | 6,85 | 18,50 |



**POLISHED GOLD ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm  | €/Pc    |
|------------|------|-------|---------|
| PKLQBO 045 | 4,5  | 10,58 | 28,57 * |

**POLISHED CHROME ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm  | €/Pc  |
|------------|------|-------|-------|
| PKLQBC 045 | 4,5  | 10,58 | 28,57 |

## COLOURS




# PROKERLAM JOLLY


ANODIZED AND POLISHED ALUMINIUM SILVER, CHROME AND GOLD

**PROKERLAM JOLLY** is a quarter-circle rounded bead profile in anodized and polished aluminium suitable to protect the external corners of coverings with low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different finishes make **PROKERLAM JOLLY** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

PKLJ... 045  
scale 1:1



## EXAMPLE FOR LAYING

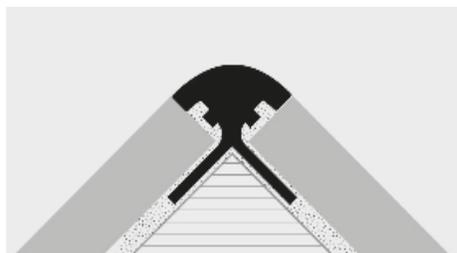

1. Choose "PROKERLAM Jolly" according to the desired finish.
2. Cut "PROKERLAM Jolly" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROKERLAM Jolly" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



**ANODIZED SILVER ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm | €/Pc    |
|------------|------|------|---------|
| PKLJAA 045 | 4,5  | 6,63 | 17,90 * |



**POLISHED CHROME ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm  | €/Pc    |
|------------|------|-------|---------|
| PKLJBC 045 | 4,5  | 10,33 | 27,89 * |

## COLOURS



**POLISHED GOLD ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm  | €/Pc    |
|------------|------|-------|---------|
| PKLJBO 045 | 4,5  | 10,33 | 27,89 * |

\* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.




**PROKERLAM LINE** is a profile in polished and brushed stainless steel AISI 304/1.4301-V2A suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

# PROKERLAM LINE


POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A



PKLLAC... 045  
scale 1:1



PKLLAC... 06  
scale 1:1



### LAYING INSTRUCTIONS



1. Choose "PROKERLAM LINE" according to the desired finish. 2. Cut "PROKERLAM LINE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROKERLAM LINE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

LOW THICKNESS

**POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film**  
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

| Article    | H mm | €/lm | €/Pcs |
|------------|------|------|-------|
| PKLLAC 045 | 4,5  | 7,97 | 21,52 |
| PKLLAC 06  | 6    | 8,21 | 22,17 |

**BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film**  
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

| Article     | H mm | €/lm  | €/Pcs |
|-------------|------|-------|-------|
| PKLLACS 045 | 4,5  | 9,90  | 26,73 |
| PKLLACS 06  | 6    | 10,26 | 27,70 |

### COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A ACS - Brushed stainless steel AISI 304/1.4301-V2A


**PROKERLAM LINE** is a Y-shaped profile in anodized and polished aluminium suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.

# PROKERLAM LINE


ANODIZED, VARNISHED AND STONE LINE ALUMINIUM



PKLL... 045  
scale 1:1



PKLL... 06  
scale 1:1



### LAYING INSTRUCTIONS



1. Choose "PROKERLAM LINE" according to the desired finish. 2. Cut "PROKERLAM LINE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROKERLAM LINE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

**ANODISED SILVER ALUMINIUM thermo packed**  
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

| Article    | H mm | €/lm | €/Pcs |
|------------|------|------|-------|
| PKLLAA 045 | 4,5  | 5,39 | 14,55 |
| PKLLAA 06  | 6    | 5,71 | 15,42 |

**VARNISHED ALUMINIUM (White-Black) thermo packed**  
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm


| Article      | H mm | €/lm | €/Pcs |
|--------------|------|------|-------|
| PKLLA 045-01 | 4,5  | 6,52 | 17,60 |
| PKLLA 045-11 | 4,5  | 6,52 | 17,60 |
| PKLLA 06-01  | 6    | 6,90 | 18,63 |
| PKLLA 06-11  | 6    | 6,90 | 18,63 |

**STONE LINE ALUMINIUM thermo packed**  
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

| Article         | H mm | €/lm | €/Pcs |
|-----------------|------|------|-------|
| PKLLA 045-SL... | 4,5  | 8,65 | 23,36 |
| PKLLA 06-SL...  | 6    | 9,17 | 24,76 |

The code of the selected colour must be added to the article code. E.g.: PKLLA 06-... (chosen colour stone cream) PKLLA 06-SL02.

### COLOURS

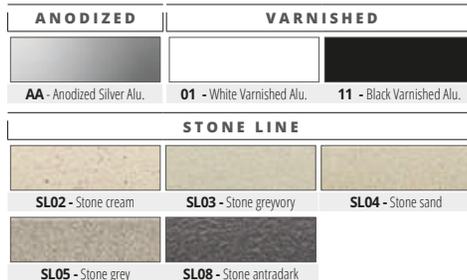





LOW THICKNESS

**PROSHELL D ALL** is a profile in anodized and polished aluminum with a visible 45° sloping surface. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL D ALL** a much sought after profile.

## PROSHELL D ALL

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM

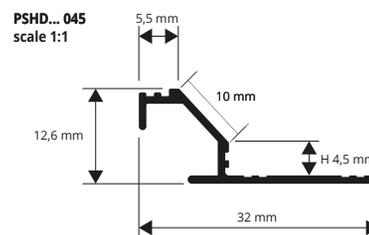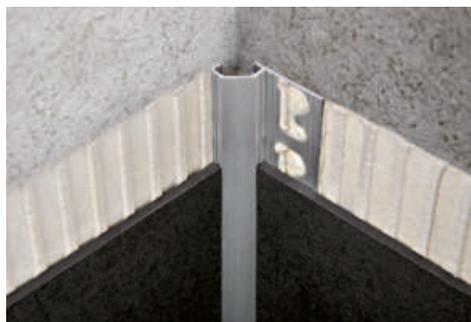


**ANODIZED SILVER ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm | €/Pc    |
|------------|------|------|---------|
| PSHDAA 045 | 4,5  | 8,32 | 22,46 * |

**POLISHED CHROME/GOLD ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm  | €/Pc    |
|------------|------|-------|---------|
| PSHDBC 045 | 4,5  | 10,58 | 28,57 * |
| PSHDBO 045 | 4,5  | 10,58 | 28,57 * |

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

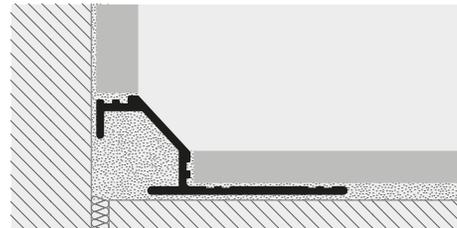

1. Choose "PROSHELL D ALL" according to the desired finish.
2. Cut "PROSHELL D ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROSHELL D ALL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

LOW THICKNESS

### COLOURS



**PROSHELL R ALL** is a cove-shaped profile in anodized and polished aluminum. The profile allows to connect the floor and wall coverings in ceramic and mosaic with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in three different finishes, make **PROSHELL R ALL** a much sought after profile.

## PROSHELL R ALL

ANODIZED SILVER, POLISHED CHROME AND GOLD ALUMINIUM




**ANODIZED SILVER ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm | €/Pc    |
|------------|------|------|---------|
| PSHRAA 045 | 4,5  | 8,32 | 22,46 * |


**POLISHED CHROME/GOLD ALUMINIUM thermo packed**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm  | €/Pc    |
|------------|------|-------|---------|
| PSHRBC 045 | 4,5  | 10,58 | 28,57 * |
| PSHRBO 045 | 4,5  | 10,58 | 28,57 * |

### COLOURS

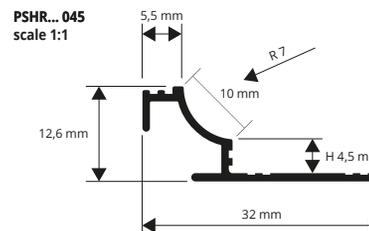


### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

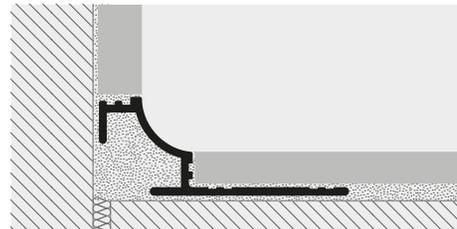


1. Choose "PROSHELL R ALL" according to the desired finish.
2. Cut "PROSHELL R ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROSHELL R ALL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

# PROINTER KL ACC

STAINLESS STEEL AISI 304/1.4301-V2A




## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

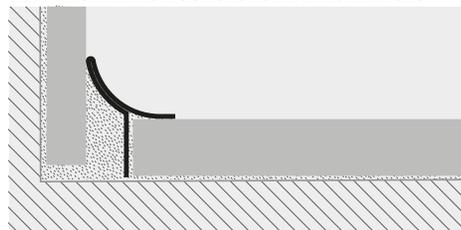

1. Choose "PROINTER KL ACC" according to the desired finish. 2. Cut "PROINTER KL ACC" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROINTER KL ACC" into the silicone evenly until it is completely adherent to the floor and wall.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROINTER KL ACC is a cove-shaped profile in stainless steel AISI 304/1.4301-V2A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes PROSHELL KL ALL a much sought after profile.

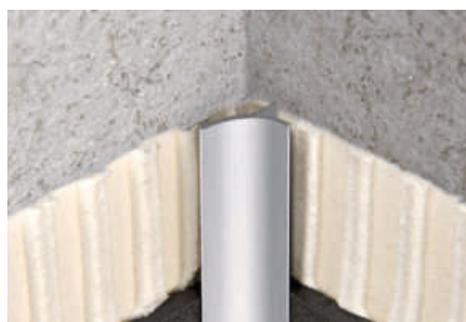

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film  
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

| Article   | H mm | €/lm  | €/Pc  |
|-----------|------|-------|-------|
| PIKLAC 15 | 15   | 12,62 | 34,07 |

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film  
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

| Article    | H mm | €/lm  | €/Pc  |
|------------|------|-------|-------|
| PIKLACS 15 | 15   | 15,94 | 43,04 |

## COLOURS



SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film  
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

| Article     | H mm | €/lm  | €/Pc    |
|-------------|------|-------|---------|
| PIKLACSB 15 | 15   | 17,27 | 46,63 * |

SUPER POLISHED ST. AISI 304/1.4301-V2A with protective film  
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm


| Article     | H mm | €/lm  | €/Pc    |
|-------------|------|-------|---------|
| PIKLACML 15 | 15   | 16,54 | 44,66 * |

## AVAILABLE MINIMUM QUANTITY 100 PCS



# PROINTER KL ALL

POLISHED AND CHROMED BRASS AND ANODIZED AND POLISHED ALUMINIUM

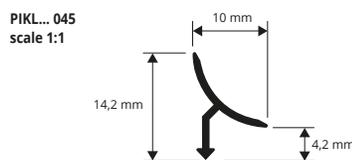

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROINTER KL ALL" according to the desired finish. 2. Cut "PROINTER KL ALL" to the desired length. 3. Apply the silicone along the floor-wall connection. 4. Press the arrowhead of "PROINTER KL ALL" into the silicone evenly until it is completely adherent to the floor and wall.

PROSHELL KL ALL is a cove-shaped profile in polished and chromed brass and anodized and polished aluminium. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section and availability in five different finishes, make PROSHELL KL ALL a much sought after profile.



POLISHED / CHROMED BRASS thermo packed  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm  | €/Pc    |
|------------|------|-------|---------|
| PIKL0L 045 | 4,5  | 15,24 | 41,15   |
| PIKLOC 045 | 4,5  | 23,82 | 64,31 * |

## CAPS - VARNISHED PLASTIC

| Article       | €/Pack. 2 Pcs | €/Pack. 10 Pcs |
|---------------|---------------|----------------|
| TPIKL .../... | 3,28          | 16,33          |



\* End caps of the on demand profiles are also on demand.

## COLOURS



POLISHED CHROME ALUMINIUM / GOLD thermo packed  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm | €/Pc  |
|------------|------|------|-------|
| PIKLBC 045 | 4,5  | 8,43 | 22,76 |
| PIKLBO 045 | 4,5  | 8,43 | 22,76 |

ANODIZED SILVER ALUMINIUM thermo packed  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article    | H mm | €/lm | €/Pc  |
|------------|------|------|-------|
| PIKLAA 045 | 4,5  | 5,91 | 15,96 |

## CAPS - VARNISHED PLASTIC

| Article       | €/Pack. 2 Pcs | €/Pack. 10 Pcs |
|---------------|---------------|----------------|
| TPIKL .../... | 3,28          | 16,33          |



## COLOURS



\* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

**PROSTYLE KL 10** is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the angle portion crimped in order to increase its adhesion. Internal height 4.5 mm. It is compulsory in public buildings to comply with accident-prevention regulations.

## PROSTYLE KL 10

ANODIZED SILVER ALUMINIUM



**ANODIZED SILVER ALUMINIUM**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article     | H mm | €/lm | €/Pc  |
|-------------|------|------|-------|
| PSYKLA 1045 | 4,5  | 8,79 | 23,73 |

### COLOURS




AA - Anodized silver aluminium

**CAPS** - pack. 2 Pcs (1 R and 1 L)

| Article        | H mm | €/Pack. |
|----------------|------|---------|
| TPSYKLA 1045/1 | 4,5  | 3,28    |


Articles not for sale singly

PSYKLA 1045  
scale 1:1



1. Cut "PROSTYLE KL 10" to the desired length.
2. Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid.
3. Lay the profile on the step tread aligning it with the tiles of the step rise.
4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile.
5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

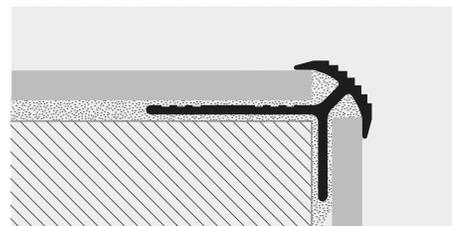

LOW THICKNESS

**PROSTAIR KL 20** is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodized aluminium with the upper portion crimped in order to increase its adhesion and a lower vertical tab created to cover the riser of the step. It is compulsory in public buildings to comply with accident-prevention regulations. Available height H 4.5 mm.

## PROSTAIR KL 20

ANODIZED SILVER ALUMINIUM

**ANODIZED SILVER ALUMINIUM**  
bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article     | H mm | €/lm | €/Pc  |
|-------------|------|------|-------|
| PTRKLA 2045 | 4,5  | 7,32 | 19,76 |


### COLOURS



AA - Anodized silver aluminium



PTRKLA 2045  
scale 1:1

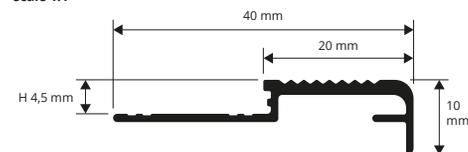

1. Cut "PROSTAIR KL 20" to the desired length.
2. Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid.
3. Fill the cavities on back of the profile with adhesive and lay it on the step tread aligning it with the tiles of the step rise.
4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile.
5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

