




An interpretation of:
Petronas Towers, César Pelli, KUALA LUMPUR (Malaysia), 1996




PROFILES FOR TERRACES

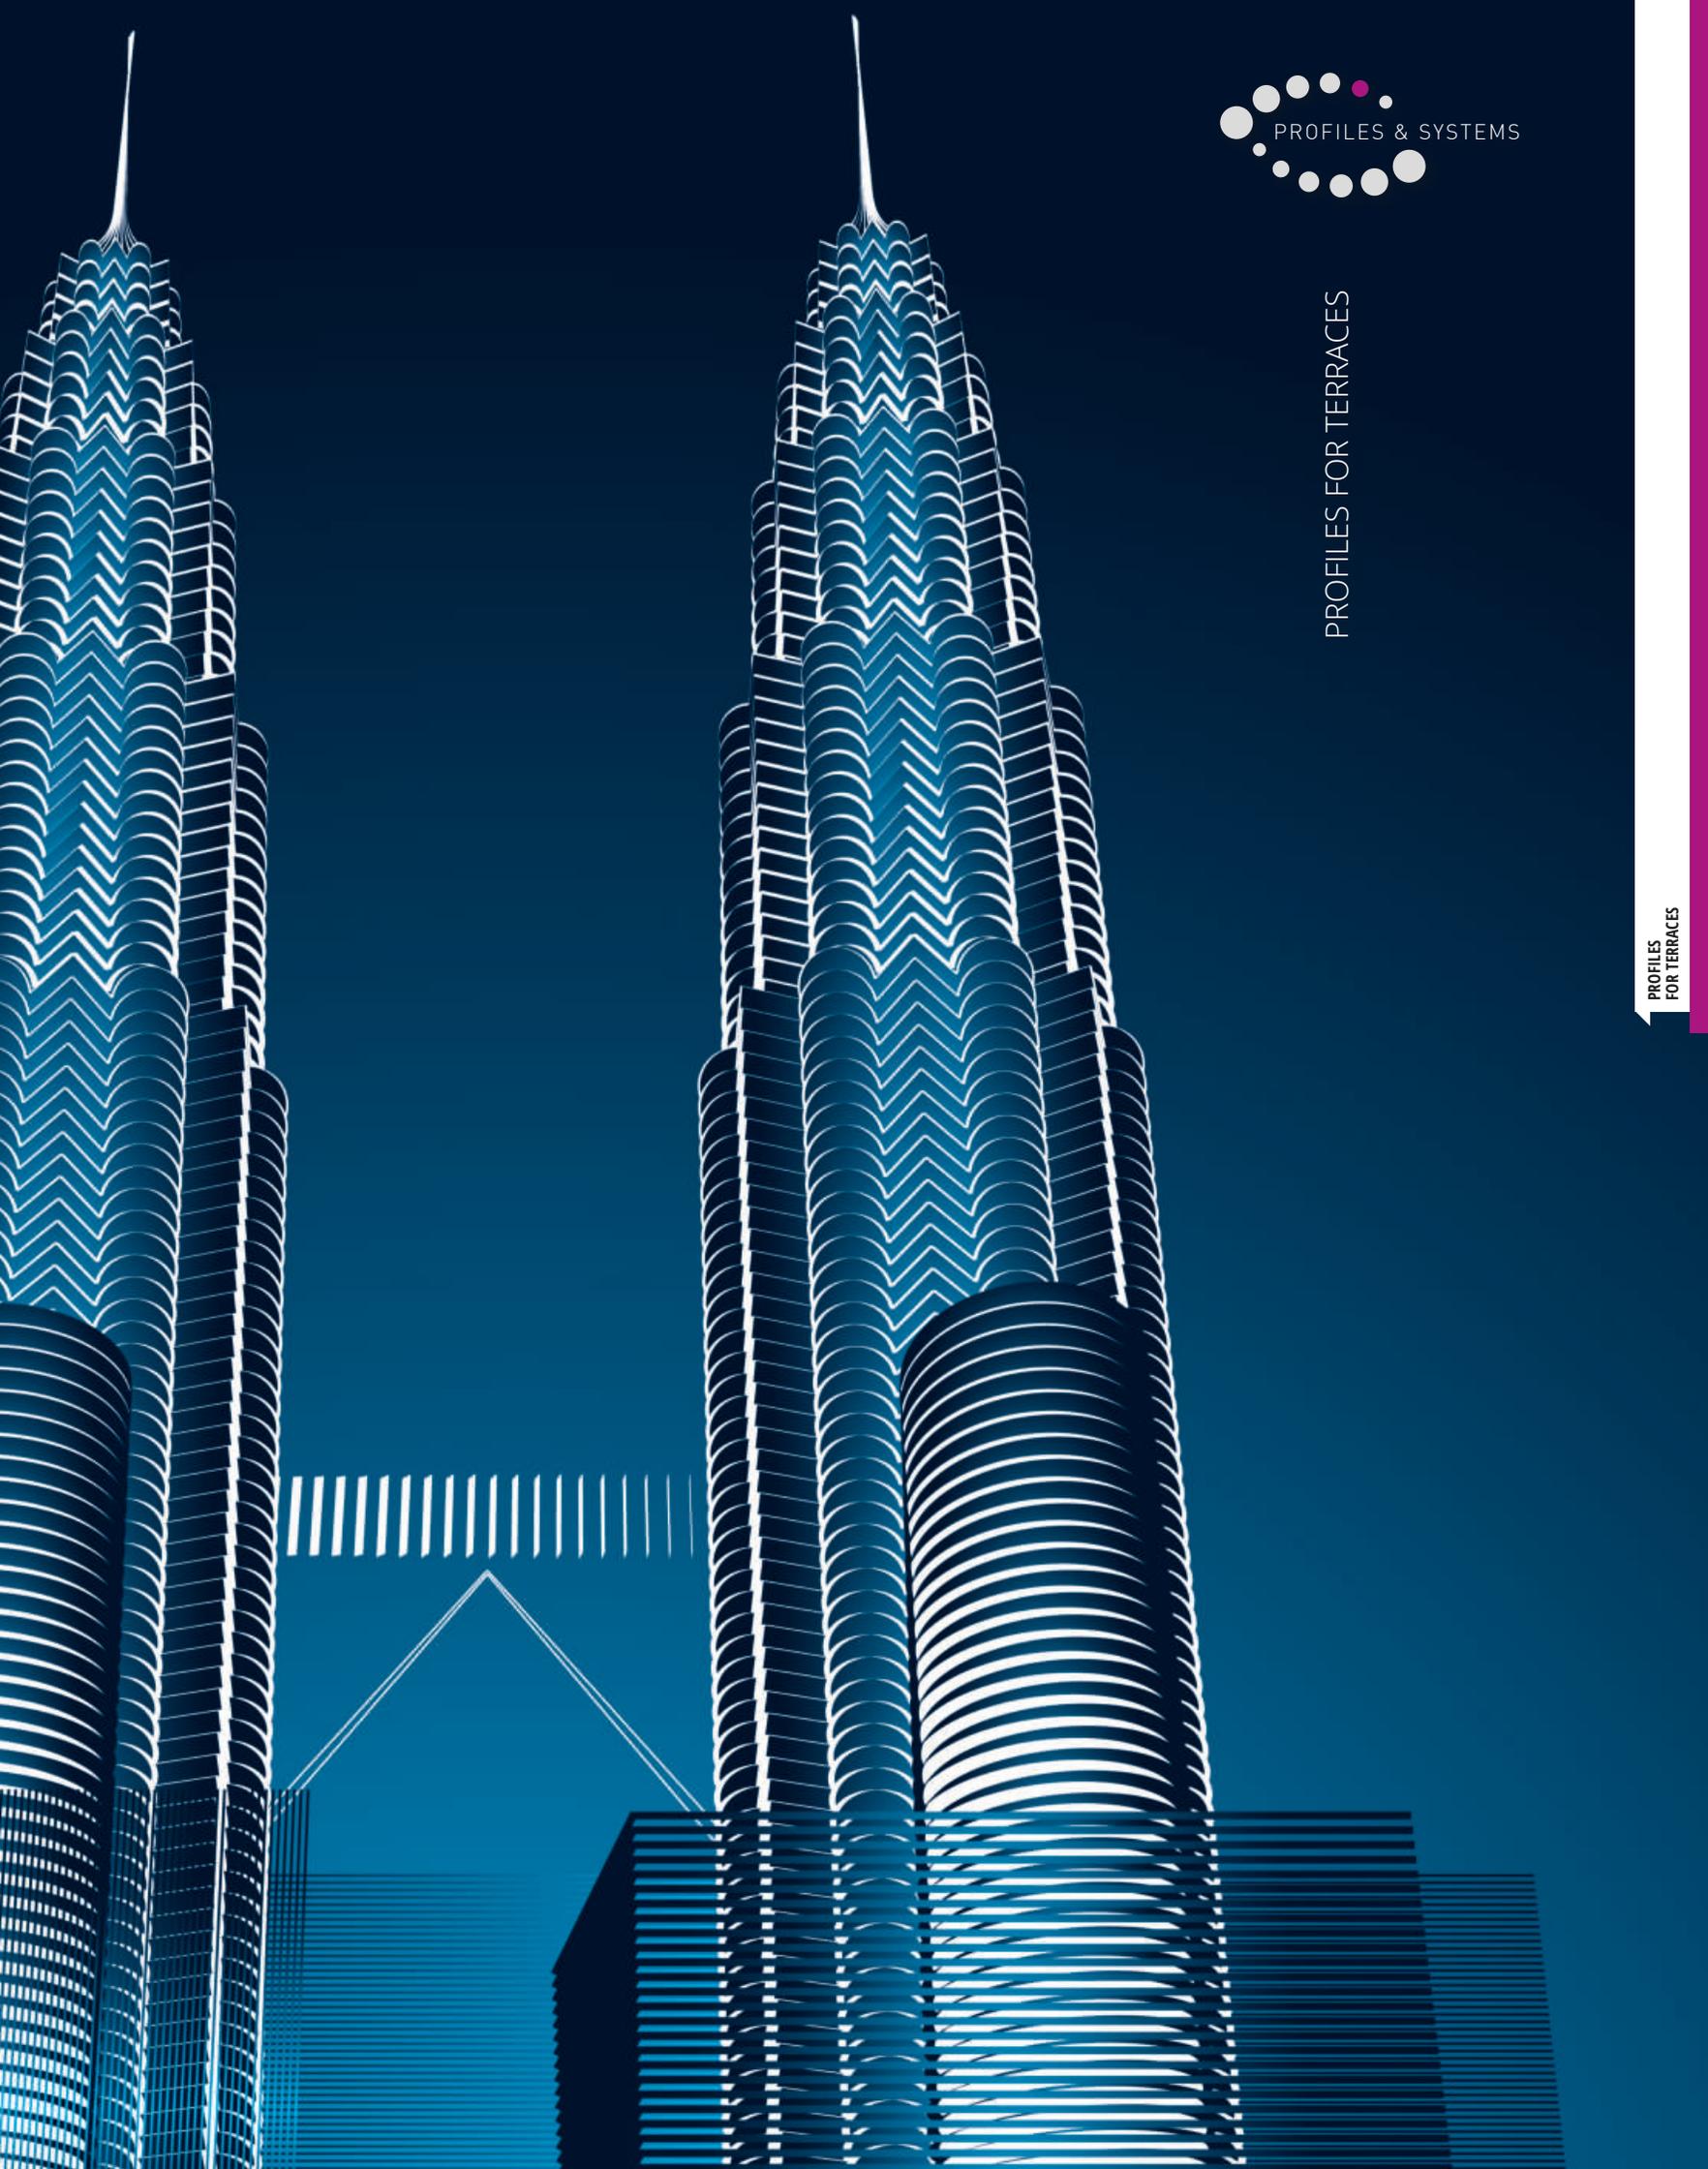


PROTERRACE DOUBLE DRIP

VARNISHED ALUMINIUM

PROTERRACE DOUBLE DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is provided with a flange that ensures the right fixing and an adhesive stripe, which protect the outflow holes to be closed by silicone. The double drip allows the drainage water to flow out in case of application with PRODESO DRAIN draining membrane. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

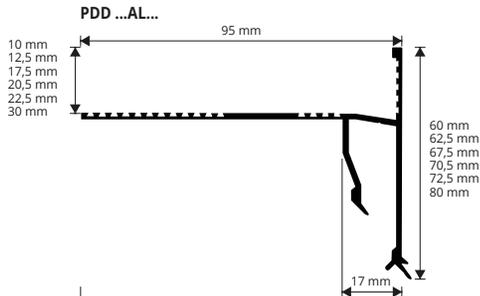

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

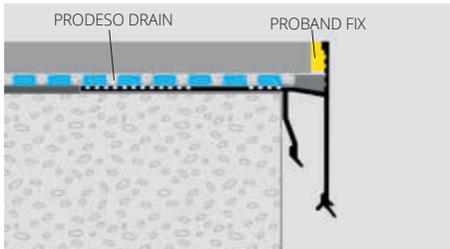

1. Choose PROTERRACE DOUBLE DRIP according to the tile thickness and desired colour.
2. Fix the external corners to the screed (at least 1 cm from it) with nails.
3. Fix the draining adhesive stripe in polyurethane on the vertical side of the profile.
4. Cut the PROTERRACE DOUBLE DRIP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate.
5. Lay the desired waterproofing system.
6. Lay the tiles leaving at 5 mm between the tile and the profile.
7. Seal the space between tile and profile with **PROBAND FIX** (P.186).

VARNISHED/COATED ALUMINIUM

bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	H mm	€/lm	€/Pc
PDD 10AL...	10	40,25	108,68
PDD 125AL...	12,5	41,67	112,51
PDD 175AL...	17,5	44,65	120,56
PDD 205AL...	20,5	45,98	124,15
PDD 225AL...	22,5	47,41	128,01
PDD 30AL...	30	51,82	139,91

Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand). The code of the selected colour must be added to the article code. E.g.: PDD 175AL... (white) PDD 175ALBF.

EXTERNAL CORNERS - pack. 10 Pcs

Article	H mm	€/Pc	€/Pack
AEPDD 10AL.../10	10	52,92	529,20
AEPDD 125AL.../10	12,5	53,48	534,80
AEPDD 175AL.../10	17,5	55,13	551,30
AEPDD 205AL.../10	20,5	55,68	556,80
AEPDD 225AL.../10	22,5	56,23	562,30
AEPDD 30AL.../10	30	58,43	584,30

JOINTS - pack. 10 Pcs

Article	H mm	€/Pc	€/Pack
GINPDD 10AL...	10	11,30	113,00
GINPDD 125AL...	12,5	11,85	118,50
GINPDD 175AL...	17,5	13,50	135,00
GINPDD 205AL...	20,5	14,06	140,60
GINPDD 225AL...	22,5	14,33	143,30
GIPDD 30AL...	30	15,99	159,90

INTERNAL CORNERS - pack. 10 Pcs

Article	H mm	€/Pc	€/Pack
AIPDD 10AL.../10	10	55,13	551,30
AIPDD 125AL.../10	12,5	55,68	556,80
AIPDD 175AL.../10	17,5	57,33	573,30
AIPDD 205AL.../10	20,5	57,89	578,90
AIPDD 225AL.../10	22,5	58,43	584,30
AIPDD 30AL.../10	30	60,64	606,40

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PDD 175ALGF (seaside) = **PDD 175ALGFS**
price for seaside treatment +50% on the gross price.

GINPDD ...AL...

AEPDD ...

AIPDD ...

EMBOSSED COLOURS

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)

COLORS ON DEMAND



EMBOSSED		SEMIGLOSSY			
EF - Beige (1019)	C - Corten	B - White (9010)	G - Grey (7038)	E - Beige (1019)	T - Dark brown (8019)



PROTERRACE DRAIN DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is provided with a flange that ensures the right fixing and an adhesive stripe, which protect the outflow holes to be closed by silicone. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROTERRACE DRAIN DRIP

VARNISHED/COATED ALUMINIUM
While stocks last.

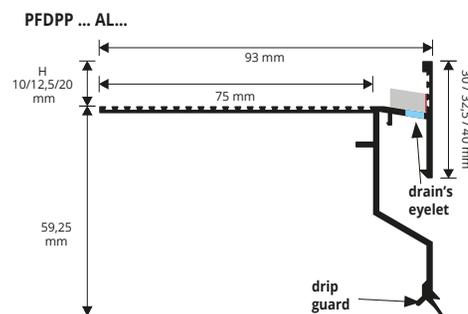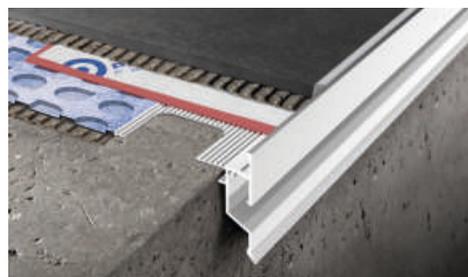


VARNISHED/COATED ALUMINIUM
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	H mm	€/lm	€/Pc
PFDPP 10AL...	10	36,51	98,58
PFDPP 125AL...	12,5	37,80	102,06
PFDPP 20AL...	20	41,71	112,62

Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand). The code of the selected colour must be added to the article code. E.g.: PFDPP 10AL... (white) PFDPP 10ALBF.

EXTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/pack
AEPFDPP 10AL.../10	46,16	461,60
AEPFDPP 125AL.../10	46,68	466,80
AEPFDPP 20AL.../10	50,97	509,70

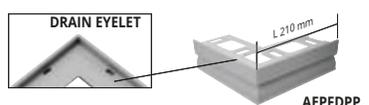


INTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/pack
AIPFDPP 10AL.../10	50,80	508,00
AIPFDPP 125AL.../10	51,45	514,50
AIPFDPP 20AL.../10	56,06	560,60



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

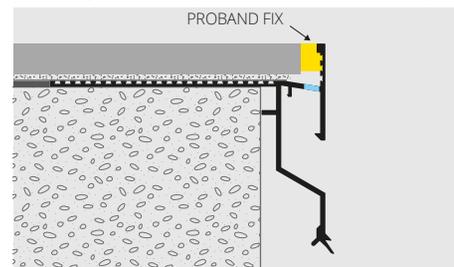

1. Choose PROTERRACE DRAIN DRIP according to the tile thickness and desired colour.
2. Fix the external corners to the screed (at least 1 cm from it) with nails.
3. Fix the draining adhesive stripe in polyurethane on the vertical side of the profile.
4. Cut the PROTERRACE DRAIN FDP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate.
5. Lay the desired waterproofing system.
6. Lay the tiles leaving at 5 mm between the tile and the profile.
7. Seal the space between tile and profile with **PROBAND FIX (P.186)**.

END CAPS - Pack. 2 PCS

Article	€/Pc	€/pack
TPFDPP AL.../2	6,27	12,54



JOINTS - pack. 1 upper + 1 lower

Article	€/Pack
GINFDPP 10AL .../1	9,87
GINFDPP 125AL .../1	10,38
GINFDPP 20AL .../1	11,92



HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PFDPP 10ALGF (seaside) = **PFDPP 10ALGFS**
price for seaside treatment +50% on the gross price.

EMBOSSED COLOURS

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)

COLORS ON DEMAND

EMBOSSED		SEMIGLOSSY			
EF - Beige (1019)	C - Corten	B - White (9010)	G - Grey (7038)	E - Beige (1019)	T - Dark brown (8019)




PROTERRACE DRAIN FDP


VARNISHED/COATED ALUMINIUM

PROTERRACE DRAIN FDP is an edging profile in varnished aluminium designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The profile is also provided with holes that allow the discharge of the water filtered between the profile and tiles. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PFDP 10AL...
scale 1:2

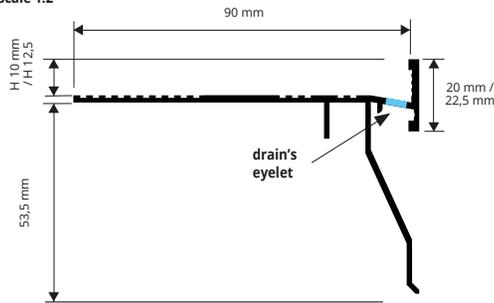


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

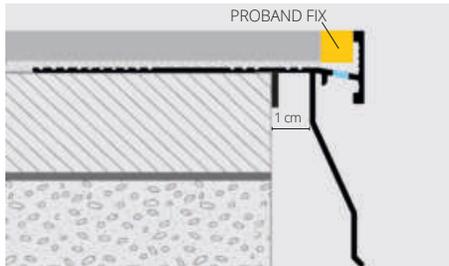

1. Choose PROTERRACE DRAIN FDP according to the tile thickness and desired colour.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE DRAIN FDP" to the desired length. Lay the profile and fix it with nails.
4. Apply the desired waterproofing system.
5. Lay the tiles, leaving about 5 mm between tiles and profile.
6. Seal the space between tiles and profile with **PROBAND FIX (P.186)**.

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PFDP 10ALGF (seaside) = **PFDP 10ALGFS**
price for seaside treatment +50% on the gross price.

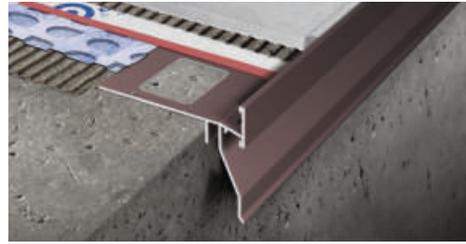

VARNISHED/COATED ALUMINIUM
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	H mm	€/lm	€/Pc
PFDP 10AL...	10	33,31	89,94
PFDP 125AL...	12,5	33,82	91,31

Available in the colours: BF - GF - A - TF (EF - C - B - G - T - E on demand)
The code of the selected colour must be added to the article code.
E.g.: PFDP 10 AL... (white) PFDP 10 ALB.

EMBOSSED COLOURS

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)

COLOURS ON DEMAND

EMBOSSED		SEMIGLOSSY	
EF - Beige (1019)	C - Corten	B - White (9010)	G - Grey (7038)
		E - Beige (1019)	T - Dark brown (8019)



EXTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/Pack.
AEPFDP 10AL.../10	42,04	420,40
AEPFDP 125AL.../10	42,43	424,30


INTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/Pack.
AIPFDP 10AL.../10	46,29	462,90
AIPFDP 125AL.../10	46,68	466,80

JOINTS - pack. 1 Pc upper + 1 Pc lower

Article	H mm	€/Pack.
GINFDP ...AL .../1	10/125	7,71


Choose the desired height and finish.
E.g.: 10 mm joint with finish A - GINFDP 10AL/A/10



AEPFDP 10/125AL...



GINFDP 10/125AL .../1




AIPFDP 10/125AL...




PROTERRACE ECO DRIP is an edging profile in aluminium designed to protect the front of the screed from water penetration and the edges of the tiles laid on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The profile is equipped with a double drip to improve the push away of water from the wall. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request in **BENDABLE VERSION** and with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROTERRACE ECO DRIP


VARNISHED/COATED ALUMINIUM

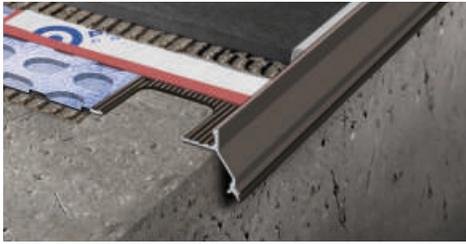


VARNISHED/COATED ALUMINIUM bar length 2,7 lm - pack. 20 Pcs - 54 lm

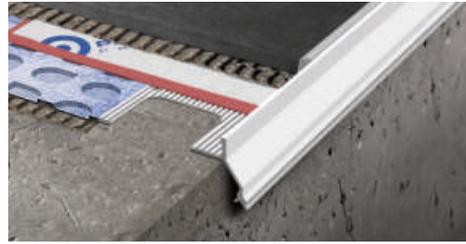

EXTERNAL CORNER - pack 10 Pc

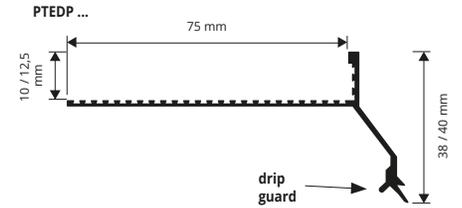

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

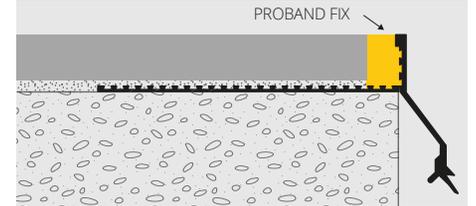

1. Choose "PROTERRACE ECO DRIP" according to the tile thickness.
 2. Cut "PROTERRACE ECO DRIP" to the desired length and fix it to the support with nails.
 3. Apply the desired waterproofing system, sealing the joint between profile and waterproofing.
 4. Lay the tiles, leaving about 5 mm between tiles and profile.
 5. Seal the space between tiles and profile using **PROBAND FIX (P.186)**.
- PROFILE BENDING:** 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PTEDP 10ALGF (seaside) = **PTEDP 10ALGFS**
price for seaside treatment +50% on the gross price.


Article	H mm	€/lm	€/Pc
PTEDP 10AL...	10	15,97	43,12
PTEDP 125AL...	12,5	17,24	46,55

Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand)
The code of the selected colour must be added to the article code.
E.g.: PTEDP 10AL... (gray) PTEDP 10GFAL.

JOINTS - pack. 2 / 10 Pcs

Article	€/pack. 2Pcs	€/pack. 10Pcs
GINEDP 10AL.../...	15,48	70,36
GINEDP 125AL.../...	16,59	75,43

EMBOSSED COLOURS




Article	€/Pc	€/Pack
AEEDP 10AL.../10	22,20	222,00
AEEDP 125AL.../10	22,82	228,20



GINEDP 10/125ALGF



AEEDP 10/125ALGF




COLOURS ON DEMAND




PROSIDE WALK is a perimeter profile in varnished aluminium, available in grey and anthracite colour. It is designed to protect the edges of the tiles and the screed on pavements. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request in **BENDABLE VERSION** and with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROSIDE WALK

VARNISHED/COATED ALUMINIUM

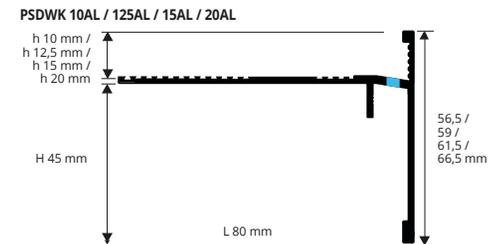

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

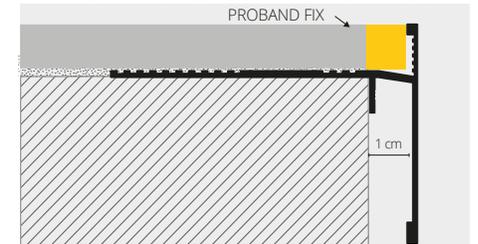

1. Choose PROSIDE WALK according to the tile thickness and desired colour.
 2. Waterproof with **PROBAND 150** and **PROBAND KOLL** the front of the screed.
 3. Fix the external corners with nails.
 4. Cut PROSIDE WALK to the desired length and fix it with nails; connect it with the corners using the junction element.
 5. Lay the tiles, leaving about 5 mm between tiles and profile.
 6. Seal the space between tiles and profile with **PROBAND FIX (P.186)**.
- PROFILE BENDING:** 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PSDWK 10ALGF (seaside) = **PSDWK 10ALGFS**
price for seaside treatment +50% on the gross price.

VARNISHED EMBOSSSED ALUMINIUM

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	h mm	H mm	L	€/lm	€/Pc
PSDWK 10AL...	10	45	80	21,22	57,29
PSDWK 125AL...	12,5	45	80	21,56	58,21
PSDWK 15AL...	15	45	80	21,87	59,05
PSDWK 20AL...	20	45	80	23,14	62,48

EMBOSSSED COLOURS



EMBOSSSED COLOURS ON DEMAND



EXTERNAL CORNERS - pack. 10 Pcs


Article	h mm	H mm	L	€/Pc	€/Pack.
AEPSDWK 10AL.../10	10	45	80	22,86	228,60
AEPSDWK 125AL.../10	12,5	45	80	23,51	235,10
AEPSDWK 15AL.../10	15	45	80	24,82	248,20
AEPSDWK 20AL.../10	20	45	80	26,69	266,90

JOINTS - pack. 10 Pcs

Article	H mm	€/Pc	€/Pack.
GINSDWK ...AL.../10	10/125/15/20	6,53	65,30

Choose the desired height and finish.
E.g.: 10 mm joint with finish A - **GINSDWK 10ALA/10**

AEPSDWK external corner (welded)




GINSDWK joint



PROTERRACE PCG

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A


PROTERRACE PCG is an edging profile in polished stainless steel INOX AISI 304/1.4301-V2A designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PCG** a much sought after and easy to lay profile. The product is also available on request in **BENDABLE VERSION**

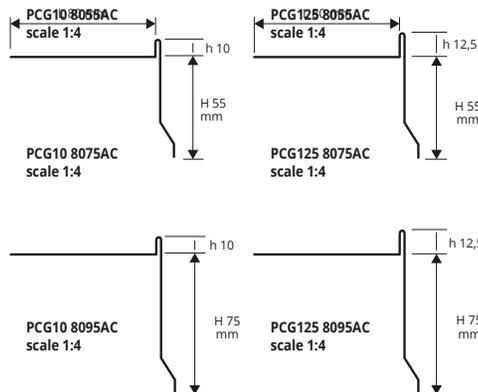

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)


Article	h x H x L mm	€/lm	€/Pc
PCG10 8055AC	10 x 55 x 80	34,43	92,96
PCG10 8075AC	10 x 75 x 80	38,19	103,11
PCG10 8095AC	10 x 95 x 80	42,78	115,51
PCG125 8055AC	12,5 x 55 x 80	34,74	93,80
PCG125 8075AC	12,5 x 75 x 80	38,58	104,17 *
PCG125 8095AC	12,5 x 95 x 80	42,92	115,88 *

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

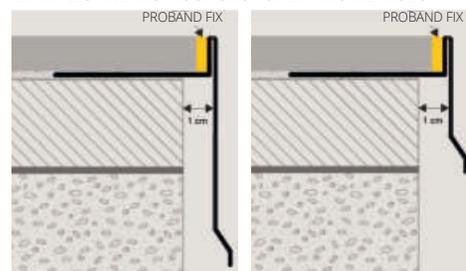

1. Choose "PROTERRACE PCG" according to the tile thickness. 2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. 3. Cut "PROTERRACE PCG" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. 4. Apply the desired waterproofing system. 5. Lay the tiles, leaving about 5 mm between tiles and profile. 6. Seal the space between tiles and profile with **PROBAND FIX (P.186)**.

PROFILE BENDING: 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

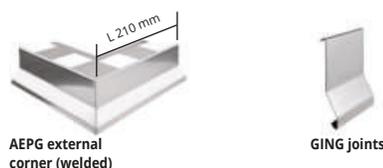

EXTERNAL CORNERS - pack 10 Pcs

Article	€/Pc	€/Pack.
AEPG10 55AC/75AC/95AC/10	57,50	575,00
AEPG125 55AC/75AC/95AC/10	57,50	575,00

JOINTS - pack 10 Pcs


Article	€/Pc	€/Pack.
GING10 55AC/75AC/95AC/10	7,35	73,50
GING125 55AC/75AC/95AC/10	7,35	73,50

* Corners and joints of the on demand profiles are also on demand

PROTERRACE PCG

VARNISHED/COATED ALUMINIUM


PROTERRACE PCG is an edging profile designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support and which is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PCG** a much sought after and easy to lay profile. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments. The product is also available on request in **BENDABLE VERSION**

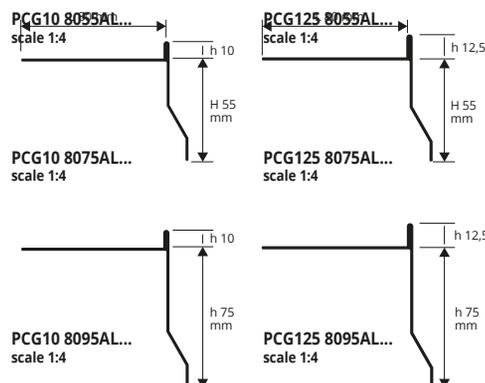

VARNISHED/COATED ALUMINIUM
bar length 2,7 lm - pack 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)

Article	h x H x L mm	€/lm	€/Pc
PCG10 8055AL...	10 x 55 x 80	23,00	62,10
PCG10 8055ALG	10 x 55 x 80	23,00	62,10 *
PCG10 8075AL...	10 x 75 x 80	26,16	70,63
PCG10 8075ALG	10 x 75 x 80	26,16	70,63 *
PCG10 8095AL...	10 x 95 x 80	29,91	80,76
PCG10 8095ALG	10 x 95 x 80	29,91	80,76 *
PCG125 8055AL...	12,5 x 55 x 80	23,00	62,10
PCG125 8075AL...	12,5 x 75 x 80	26,16	70,63
PCG125 8095AL...	12,5 x 95 x 80	29,91	80,76

EXEMPLES OF LAYING (for laying instructions, see above)

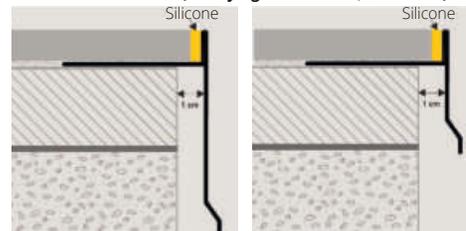

EMBOSSED COLOURS

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)
-------------------	------------------	------------------------------	------------------------

COLOURS ON DEMAND


EMBOSSED	
EF - Beige (1019)	C - Corten

SEMIGLOSSY

B - White (9010)	G - Grey (7038)	E - Beige (1019)	T - Dark brown (8019)
------------------	-----------------	------------------	-----------------------

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PCG10 8055ALGF (seaside) = **PCG10 8055ALGFS**
price for seaside treatment +50% on the gross price.

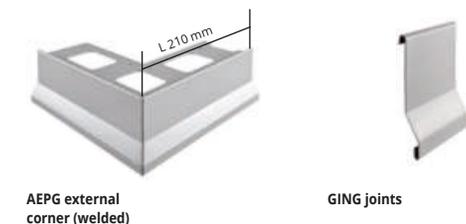

EXTERNAL CORNERS - pack 10 Pcs

Article	€/Pc	€/Pack.
AEPG10 55AL.../75AL.../95AL.../10	32,60	326,00
AEPG125 55AL.../75AL.../95AL.../10	32,60	326,00

JOINTS - pack 10 Pcs

Article	€/Pc	€/Pack.
GING10 55AL.../75AL.../95AL.../10	6,44	64,40
GING125 55AL.../75AL.../95AL.../10	6,44	64,40

The code of the selected colour must be added to the article code. E.g.: AEPG10 55AL... (white) AEPG10 55ALB.

* Corners and joints of the on demand profiles are also on demand

News 2023

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.


PROTERRACE PC is a perimeter profile in polished stainless steel inox aisi 304/1.4301-V2A designed to protect the screed on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request in **BENDABLE VERSION**.

PROTERRACE PC


POLISHED STAINLESS STEEL AISI 304/1.4301-V2A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

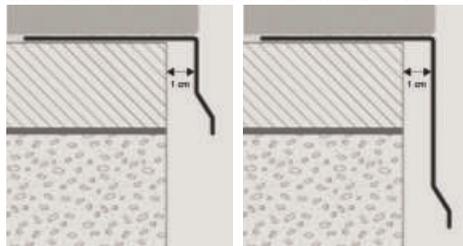

PC 8055AC
scale 1:2

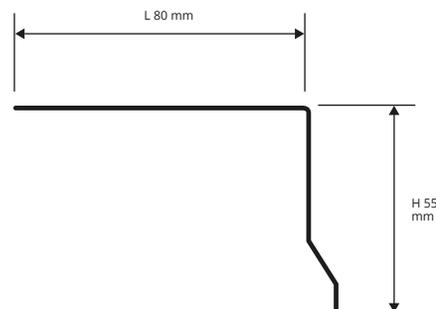

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 7 Pcs - 18,9 lm (H 75 mm - 13,5 lm - H 95 mm - 5,4 lm)

Article	L x H mm	€/lm	€/Pc
PC 8055AC	80 x 55	32,52	87,80

1. Choose "PROTERRACE PC" according to the desired height. 2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. 3. Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. 4. Apply the desired waterproofing system. 5. Lay the tiles. **PROFILE BENDING:** 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

EXTERNAL CORNERS - pack. 10 Pcs


Article	€/Pc	€/Pack.
AEPC 55AC 10	57,32	573,20

JOINTS - pack. 10 Pcs

Article	€/Pc	€/Pack.
GINC 55AC 10	8,05	80,50

* Corners and joints of the on demand profiles are also on demand

AEPC external corner (welded)



GINC joints




PROTERRACE PC is a perimeter profile in varnished aluminium designed to protect the screed on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments. The product is also available on request in **BENDABLE VERSION**.

PROTERRACE PC


VARNISHED/COATED ALUMINIUM



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

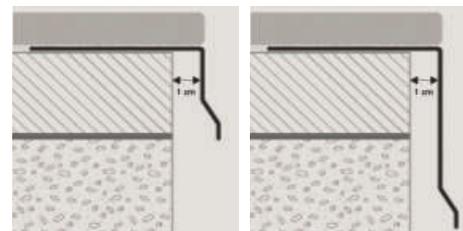

PC 8055AL
scale 1:2

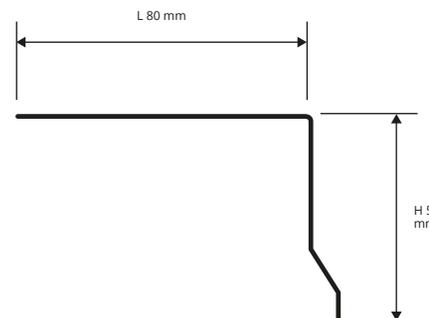

VARNISHED/COATED ALUMINIUM - bar length 2,7 lm
pack. 7 Pcs - 18,9 lm (H 75 mm - 13,5 lm - H 95 mm - 5,4 lm)

Article	L x H mm	€/lm	€/Pc
PC 8055AL...	80 x 55	21,53	58,13

The code of the selected colour must be added to the article code.
E.g.: PC 8055AL... (white) PC 8055ALB.

1. Choose "PROTERRACE PC" according to the desired colour and height. 2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. 3. Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. 4. Apply the desired waterproofing system. 5. Lay the tiles. **PROFILE BENDING:** 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

SEMIGLOSSY COLOURS ON DEMAND

B - White (9010)	G - Grey (7038)	T - Dark brown (8019)
E - Beige (1019)		

EMBOSSED COLOURS ON DEMAND

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)
EF - Beige (1019)	C - Corten	TF - Dark brown(8019)

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PC 8055ALGF (seaside) = **PC 8055ALGFS**
price for seaside treatment +50% on the gross price.

EXTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/Pack.
AEPC 55AL... 10	31,50	315,00


JOINTS - pack. 10 Pcs

Article	€/Pc	€/Pack.
GINC 55AL... 10	6,09	60,90

The code of the selected colour must be added to the article code. E.g.: AEPC 55AL... (white) AEPC 55ALB.

* Corners and joints of the on demand profiles are also on demand

AEPC external corners (welded)




GINC joints





PRO TERRACE UNDER EDGE L

VARNISHED ALUMINIUM

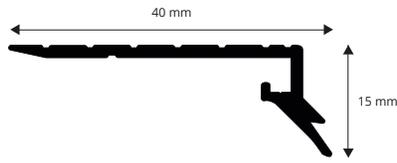

EXAMPLES AND INSTALLATION INSTRUCTIONS

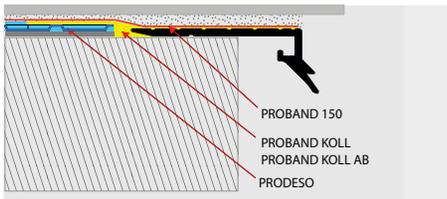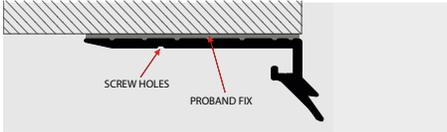


INSTALLATION UNDER TILES OR MARBLES:

1. Choose proterrace under edge l according to the desired colour. 2. Cut proterrace under edge l to the required size and fix it with nails to the substrate taking care to leave 2 mm between two adjacent bars. 3. Apply the desired waterproofing system. 4. Lay the flooring. 5. Fix the joints with proband fix.

INSTALLATION ON LOWER EDGES OF TERRACES AND BALCONIES:

1. Choose proterrace under edge l according to the desired colour. 2. Cut proterrace under edge l to the required size and secure it with proband fix and screws to the substrate taking care to leave 2 mm between two adjacent bars. 3. Fix the joints by gluing them with proband fix.

PRO TERRACE UNDER EDGE L is a perimetric profile in aluminium designed to be installed under the edges of tiles or marbles laid on terraces and balconies, or can be installed as a terminal of lower edges of outdoor terraces with drip function and to ensure proper water outflow. Thanks to its ease of application and availability in different colors it is a highly appreciated profile.

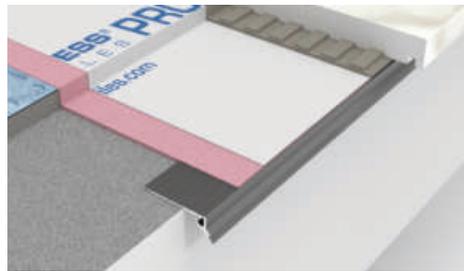

PRO TERRACE UNDER EDGE L Varnished aluminium
Bar length 2.7 Lm - pack 5 pcs - 13.50 LM

Article	H mm	€/ml	€/Pc
PTUE...	15	16,54	44,66

JOINTS
Varnished aluminium

Article	€/pack. 2 Pcs	€/pack. 10 Pcs
GINPTUE...	11,03	49,61

CAPSULES
Varnished aluminium - pack 2 Pcs

Article	€/Pc	€/pack.
CPPTUE...S (left)	15,44	30,88
CPPTUE...D (right)	15,44	30,88

END CAPS
Varnished aluminium - pack 2 Pcs

Article	€/Pc	€/pack.
TPPTUE...S (left)	5,51	11,02
TPPTUE...D (right)	5,51	11,02

STANDARD COLOURS

BF - Embossed white (9010)	GF - Embossed grey (7038)	AN - Natural aluminium
----------------------------	---------------------------	------------------------



GINPTUE...



CPPTUE...S



CPPTUE...D



TPPTUE...S




TPPTUE...D

GAMMA COLORI A RICHIESTA


GOFFRATI				SEMILUCIDI			
E - Beige (1019)	C - Corten	A - Anthracite grey (no RAL)	TF - Dark brown (8019)	B - White (9010)	G - Grey (7038)	E - Beige (1019)	T - Dark brown (8019)

PRO TERRACE UNDER EDGE C

VARNISHED ALUMINIUM

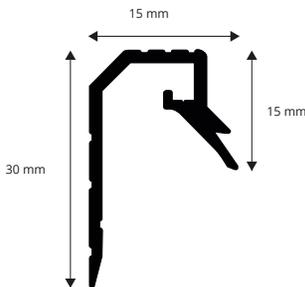


EXAMPLES AND INSTALLATION INSTRUCTIONS

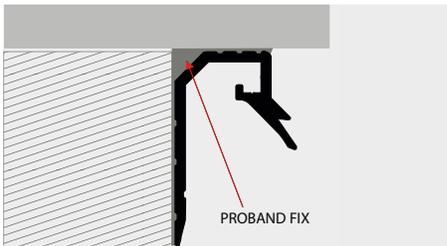

INSTALLATION UNDER TILES OR MARBLES:

1. Choose proterrace under edge c according to the desired colour; 2. Cut proterrace under edge c to the required size; 3. Glue the profile to the structure with proband fix and secure it with screws, taking care to leave 2 mm between two adjacent bars; 4. Attach the joints with proband fix.

PRO TERRACE UNDER EDGE C is a perimetric profile in aluminium designed to be installed under the edges of tiles or marbles laid on terraces and balconies and to ensure proper water outflow. Thanks to its ease of application and availability in different colors it is a highly appreciated profile.

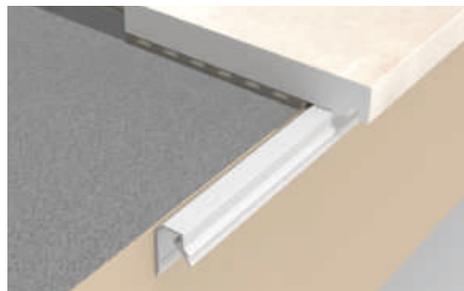

PRO TERRACE UNDER EDGE C Varnished aluminium
Bar length 2.7 Lm - pack 5 pcs - 13.50 LM

Article	H mm	€/ml	€/Pc
PTUEC...	15	16,76	45,25

JOINTS
Varnished aluminium

Article	€/pack. 2 Pcs	€/pack. 10 Pcs
GINPTUE...	11,03	49,61

CAPSULES
Varnished aluminium - pack 2 Pcs

Article	€/Pc	€/pack.
CPPTUE...S (left)	15,44	30,88
CPPTUE...D (right)	15,44	30,88

END CAPS
Varnished aluminium - pack 2 Pcs

Article	€/Pc	€/pack.
TPPTUE...S (left)	5,51	11,02
TPPTUE...D (right)	5,51	11,02

STANDARD COLOURS

BF - Embossed white (9010)	GF - Embossed grey (7038)	AN - Natural aluminium
----------------------------	---------------------------	------------------------



GINPTUE...



CPPTUE...S



CPPTUE...D



TPPTUE...S



TPPTUE...D

GAMMA COLORI A RICHIESTA


GOFFRATI				SEMILUCIDI			
E - Beige (1019)	C - Corten	A - Anthracite grey (no RAL)	TF - Dark brown (8019)	B - White (9010)	G - Grey (7038)	E - Beige (1019)	T - Dark brown (8019)

PROSHOWER LATERAL AND VERTICAL DRAIN KIT are 2 central drain systems with lateral or vertical outflow equipped with a siphon, grate support, stainless steel grate, butyl double-sided ring for the fixing of the waterproof section, waterproof section and a protection cap with template function too that allows the correct positioning of the butyl ring and the waterproof section. LATERAL AND VERTICAL DRAIN KIT ensure a correct flow of rainwater.

PROSHOWER DRAIN KIT

LATERAL AND VERTICAL DRAINS

Article	Description	Pc/Pack.	€/Pc
PSHLDK	PROSHOWER DRAIN LATERAL KIT	1	158,49
PSHVDK	PROSHOWER DRAIN VERTICAL KIT	1	133,13

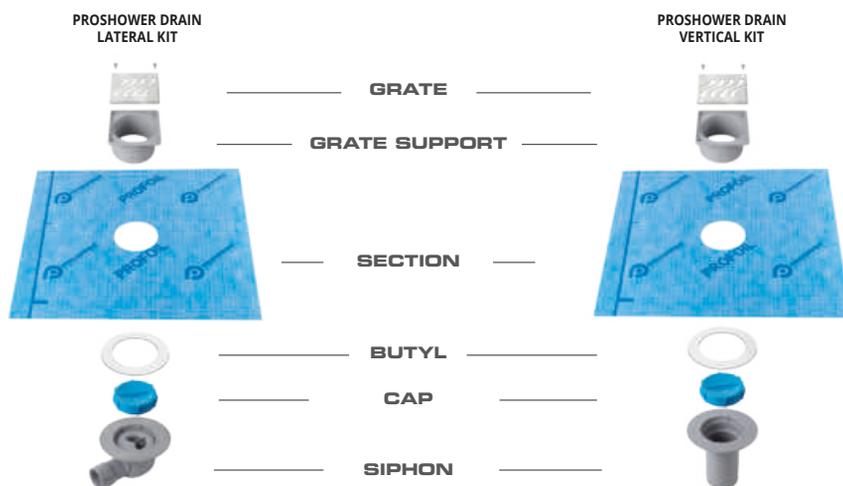

PROSHOWER DRAIN LATERAL KIT PSHLDK

PROSHOWER DRAIN VERTICAL KIT PSHVDK

AREA OF USE

- **Use** - Balconies, terraces, outdoor surfaces of any size, kitchens and showers.
- **Don't use** - In environments subject to heavy traffic and where washing with acidic and strong alkaline substances is foreseen.

WARNINGS

After the drain installation, apply the protective cap. Before applying the butyl double-sided adhesive ring on the flange of the drain, thoroughly clean the flange of any dirt residue that may compromise its adhesion. Apply the butyl double-sided adhesive ring and the waterproofing section during the application of the waterproofing system.

PROSHOWER DRAIN CENTRAL PRO is a 10x10 cm stainless steel AISI 316L / 1.4404 – V4A drain for the realisation of floor-level shower. This low thickness drain is equipped with a grid that can also be tiled for floor-level drains. PROSHOWER DRAIN CENTRAL PRO has excellent chemical resistance and is equipped with a 360° adjustable siphon.

PROSHOWER DRAIN CENTRAL PRO


LATERAL DRAIN

PROSHOWER DRAIN CENTRAL PRO - GRATE + POLYSTYRENE CHANNEL PROTECTION + PROFOIL SECTION + DUCT BODY + SIPHON

Article	Description	Pc/Pack.	€/Pc
PSHWCP	PROSHOWER DRAIN CENTRAL PRO	1	176,40

AREA OF USE

- **Use** - PROSHOWER BASE L PRO it can be used in any indoor and outdoor environment.
- **Don't use** - In environments where very aggressive substances are used and a high concentrated load is expected.

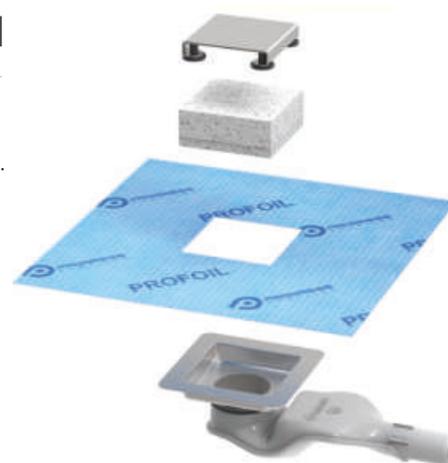

PRODRIP is a perimeter drain in ASA (Modified ABS) equipped with wall-floor junction. The junction is covered with non-woven polypropylene to ensure sealing with the used waterproofing system.

PRODRIP

PERIMETRAL DRAIN

PERIMETER DRAIN
pack. per pallet = 192

Article	Pcs/Pack.	€/Pc	€/Pack.
PDRP	4	24,82	99,28

AREA OF USE

- **Use** - To realise perimeter drains on balconies, terraces and outside horizontal surfaces of any size.
- **Don't use** - With bituminous waterproofing and as vertical drain.

WARNINGS

Do not heat with direct flames and do not use adhesive with solvents. Consult the data sheet prior to application in the case of special applications, we recommend that you consult the technical department.

